
USHID Applying Light to Life




SMBB1200D-2100S-I

1200nm High Power TOP LED

Outline and Internal Circuit

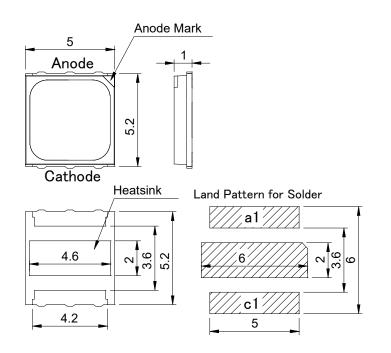



(Unit : mm)





2024.11

PRELIMINARY

SMBB1200D-2100S-I

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Power Dissipation	PD	3400	mW
Forward Current	IF	1000	mA
Pulse Forward Current	IFP	2000	mA
Reverse Voltage	VR	10	V
Thermal Resistance	Rthjs	10	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C

‡Pulse Forward Current condition : Duty 1% and Pulse Width=10us.

‡Soldering condition : Refer to technical support information on the website.

Optical and Electrical Characteristics (Tc=25°C)


(*: 100% testing, **: reference value)

Parameter	Symbol	Min	Тур	Мах	Unit	Test Condition
Forward Voltage	VF		2.8	3.4	V	IF=1A*
	VFP		3.6			IFP=2A**
Reverse Current	IR			10	uA	VR=10V*
Total Radiated Power	PO	150	280		mW	IF=1A*
			500			IFP=2A**
Peak Wavelength	λρ	1150		1250	nm	IF=1A*
Half Width	Δλ		85		nm	IF=1A**
Rise Time	tr		90		ns	IF=1A**
Fall Time	tf		30		ns	IF=1A**

‡ Radiated Power is measured by G8370-85.

SMBB1200S-2100S-I

Typical Characteristic Curves

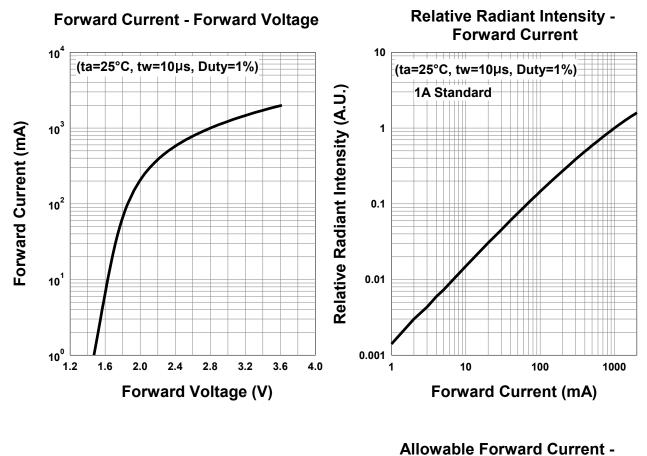

Forward Current - Pulse Duration

10kHz

10²

10¹

100Hz

10⁴

10Hz

10⁶

10⁵

1kHz

10³

Duration tw (µs)


Forward Current Ifp (mA)

10³9

10²


10⁰

1200 Rthjs=10K/W 1100 Allowable Forward Current (mA) 1000 900 800 700 600




Ambient Temperature

SMBB1200S-2100S-I

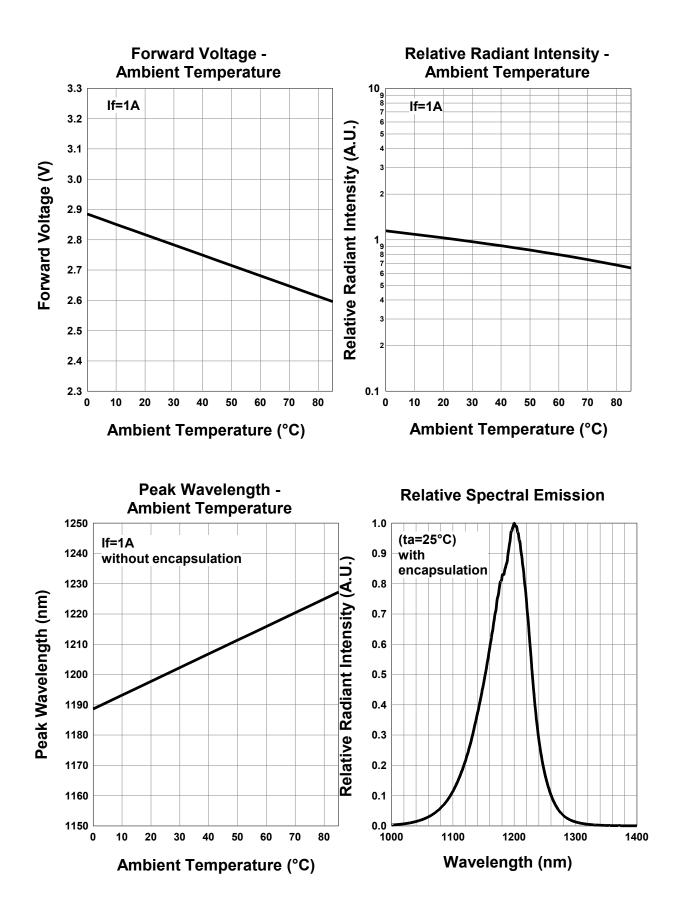

SMBB1200S-2100S-I

*The absorption of lens resin changes spectral emission.

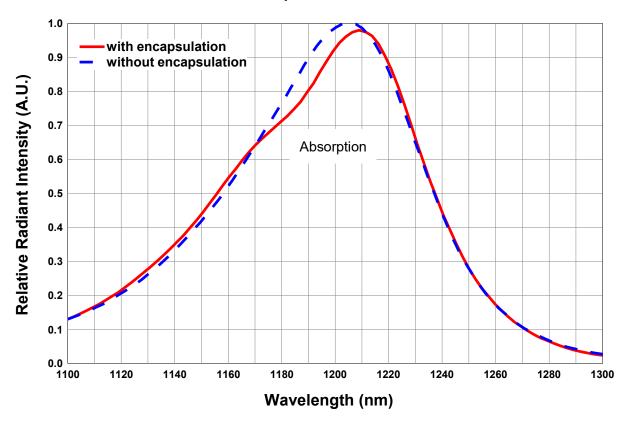

Relative Spectral Emission

SMBB1200S-2100S-1

Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

SMD LED storage and handling precautions

Storage Conditions before Opening a Moisture-Barrier Aluminum Bag

- Before opening a moisture-barrier aluminum bag, please store it at <30°C, <60%RH.
- Please note that the maximum shelf life is 12 months under these conditions.

Storage Conditions after Opening a Moisture-Barrier Aluminum Bag

- After opening a moisture-barrier aluminum bag, store the aluminum bag and silica gel in a desiccator.
- After opening the bag, please solder the LEDs within 72 hours in a room with 5 30°C, <50%RH.
- Please put any unused, remaining LEDs and silica gel back in the same aluminum bag and then vacuum-seal the bag.
- It is recommended to keep the re-sealed bag in a desiccator at <30%RH.
- The 72-hour- long floor life does not include the time while LEDs are stored in the moisture-barrier aluminum bag. However, we strongly recommend to solder the LEDs as soon as possible after opening the aluminum bag.

Notes about Re-sealing a Moisture-Barrier Aluminum Bag

 When vacuum-sealing an opened aluminum bag, if you find the moisture-indicator of the silica gel has changed to pink from blue (indicating a relative humidity of 30 % or more), please do not use the unused LEDs, the aluminum bag, or the silica gel.

Notes about Opening a Re-sealed Moisture-Barrier Aluminum Bag

• When opening a vacuumed and re-sealed aluminum bag in order to use the remaining LEDs stored in the bag, if you find that the moisture-indicator of the silica has changed to pink, please do not use the LEDs.

SMBB1200D-2100S-I

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

Technical Support Information

https://www.ushio.co.jp/en/led/technology/index.html



USHIO