




DXL-30BAF/LU

Technical Data

Input Power	W	-	3000	
Voltage	V	-	29.4	
Current	A	-	102	
Operating Range	W/A	-	64-110(A)	
Lamp Length	mm	a	294	
LCL	mm	b	123	
Cold Arc Gap	mm	c	5	
	Base Diameter	mm (Φ)	d	32
Cathode	Pin Diameter	-	e	M12 × 1.75
	Pin Length	mm	f	14
Anode	Base Diameter	mm (Φ)	g	30
	Pin Diameter	Φ	h	14
	Pin Length	mm	i	19
Bulb diameter	mm (Φ)	j	60	
Cable length	mm	k	135	
Crimping terminal	-	l	22-10	

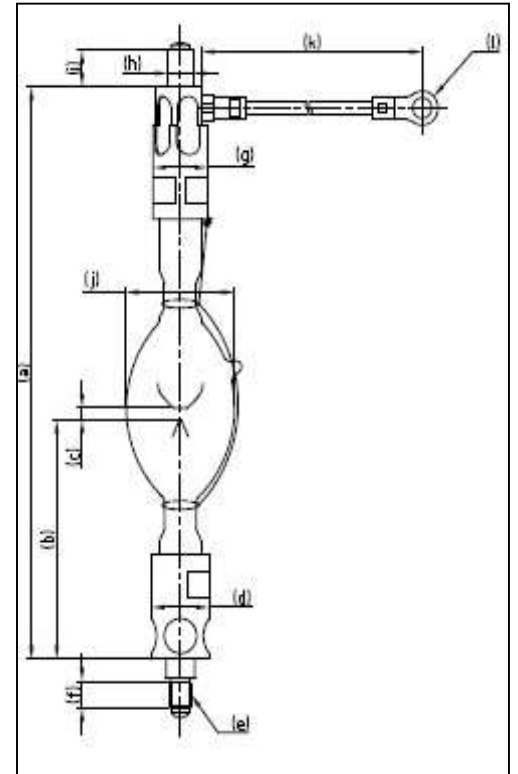

Warranty Hours

DXL-30BAF/LU	2200
--------------	------

Cross Reference

Lamp Type	Projector Model
DXL-30BAF/LU	DP1500
	DP2000
	DP2K-15C
	DP2K-19B
	DP4K-19B
	DP2K-20C
	DP2K-23B
	DP4K-23B