




# DXL-65BA2

### Technical Data

|                   |               |        |   |            |
|-------------------|---------------|--------|---|------------|
| Input Power       |               | W      | - | 6500       |
| Voltage           |               | V      | - | 39.5       |
| Current           |               | A      | - | 165        |
| Operating Range   |               | W/A    | - | 110-178(A) |
| Lamp Length       |               | mm     | a | 375.5      |
| LCL               |               | mm     | b | 158.5      |
| Cold Arc Gap      |               | mm     | c | 8          |
| Cathode           | Base Diameter | mm (Φ) | d | 30         |
|                   | Pin Diameter  | mm (Φ) | e | M14×1.5    |
|                   | Pin Length    | mm     | f | 10.5       |
| Anode             | Base Diameter | mm (Φ) | g | 30         |
|                   | Pin Diameter  | mm (Φ) | h | 14         |
|                   | Pin Length    | mm     | i | 19         |
| Bulb diameter     |               | mm (Φ) | j | 70         |
| Cable length      |               | mm     | k | 156        |
| Crimping terminal |               | mm     | l | 22-14      |

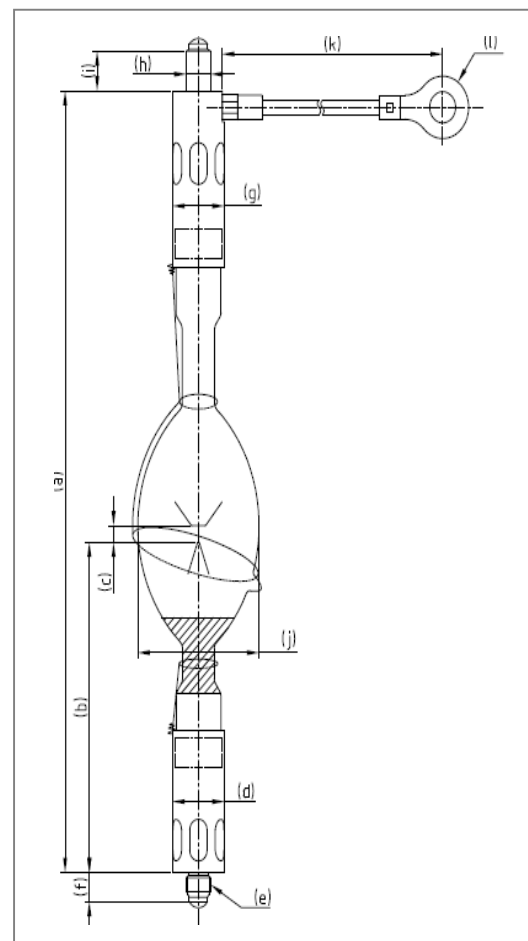

### Warranty Hours

|           |     |
|-----------|-----|
| DXL-65BA2 | 500 |
|-----------|-----|

### Cross Reference

| Lamp Type | Projector Model      |
|-----------|----------------------|
| DXL-65BA2 | DP2K-32B<br>DP4K-32B |