




DXL-65BA3

Technical Data

| | | | |
|-------------------|---------------|--------|------------|
| Input Power | W | - | 6500 |
| Voltage | V | - | 39.4 |
| Current | A | - | 165 |
| Operating Range | W/A | - | 114-184(A) |
| Lamp Length | mm | a | 375.5 |
| LCL | mm | b | 158.5 |
| Cold Arc Gap | mm | c | 8 |
| Cathode | Base Diameter | mm (Φ) | d |
| | Pin Diameter | mm (Φ) | e |
| | Pin Length | mm | f |
| Anode | Base Diameter | mm (Φ) | g |
| | Pin Diameter | mm (Φ) | h |
| | Pin Length | mm | i |
| Bulb diameter | mm (Φ) | j | 80 |
| Cable length | mm | k | 156 |
| Crimping terminal | mm | l | 22-14 |

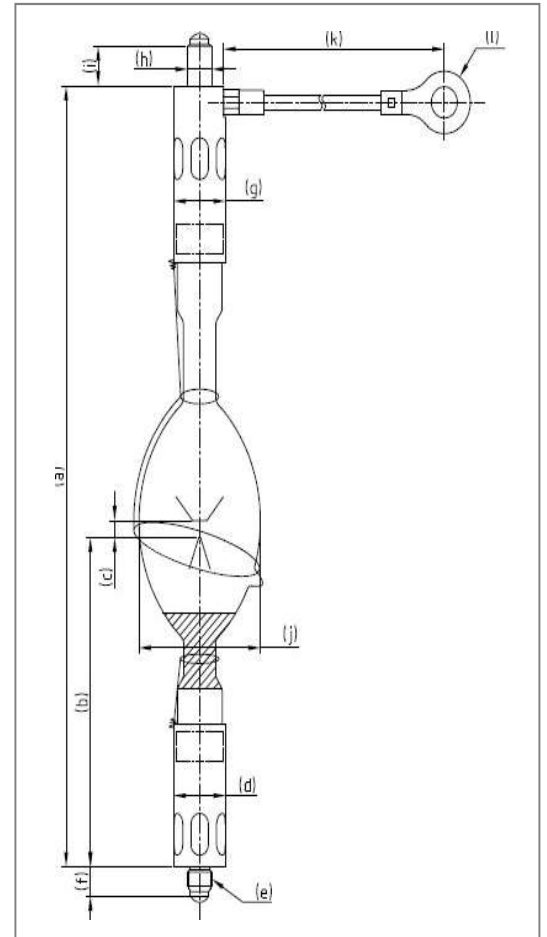

Warranty Hours

| | |
|-----------|-----|
| DXL-65BA3 | 700 |
|-----------|-----|

Cross Reference

| Lamp Type | Projector Model |
|-----------|-----------------|
|-----------|-----------------|

| | |
|-----------|----------------------|
| DXL-65BA3 | DP2K-32B DP4K-32B |
|-----------|----------------------|