




DXL-40BAF/LU

Technical Data

| | | | |
|-------------------|---------------|--------|--------------|
| Input Power | W | - | 4200 |
| Voltage | V | - | 31.5 |
| Current | A | - | 133 |
| Operating Range | W/A | - | 2940-4200(W) |
| Lamp Length | mm | a | 294 |
| LCL | mm | b | 123 |
| Cold Arc Gap | mm | c | 6 |
| Cathode | Base Diameter | mm (Φ) | d |
| | Pin Diameter | mm (Φ) | e |
| | Pin Length | mm | f |
| Anode | Base Diameter | mm (Φ) | g |
| | Pin Diameter | mm (Φ) | h |
| | Pin Length | mm | i |
| Bulb diameter | mm (Φ) | j | 60 |
| Cable length | mm | k | 131 |
| Crimping terminal | mm | l | 22-10 |

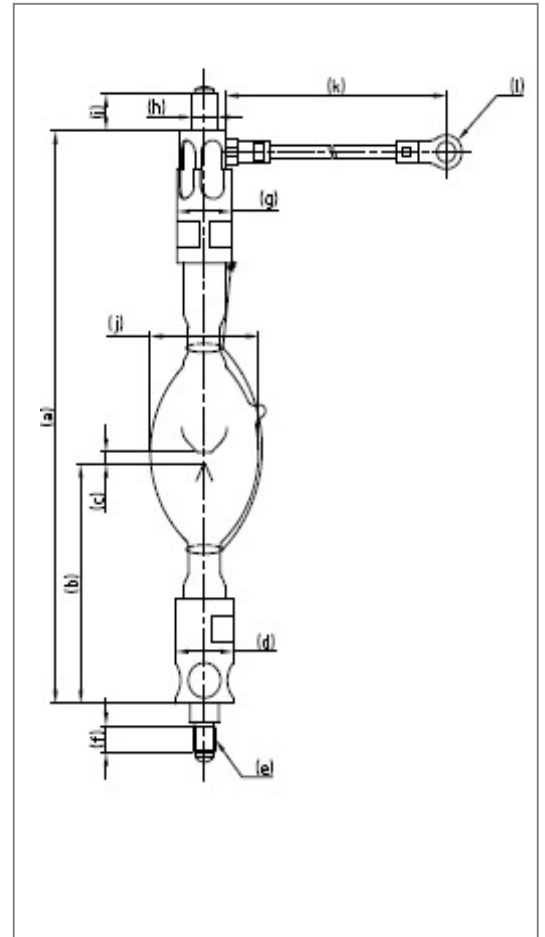

Warranty Hours

| | |
|--------------|------|
| DXL-40BAF/LU | 1900 |
|--------------|------|

Cross Reference

| Lamp Type | Projector Model |
|--------------|-----------------|
| DXL-40BAF/LU | DP2K-15C |
| | DP2K-19B |
| | DP4K-19B |
| | DP2K-20C |
| | DP2K-23B |
| | DP4K-23B |